

HUSKY 1A NOZZLE

AUTOMATIC NOZZLE


CONVENTIONAL FUELING

Automatic shut off nozzle for full-service and self-service stations.

- 1A nozzle shuts off when the gas tank is full.
- Equipped with a unique Flo-Stop™ device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- Aluminum reinforced spout bushing keeps spout tip round and acts as a captive fastener to prevent tip-end sensor damage.

- *StreamShaper™* reduces turbulence for straighter fuel flow and less splash back spillage.

- Comes standard with smooth full grip guard.

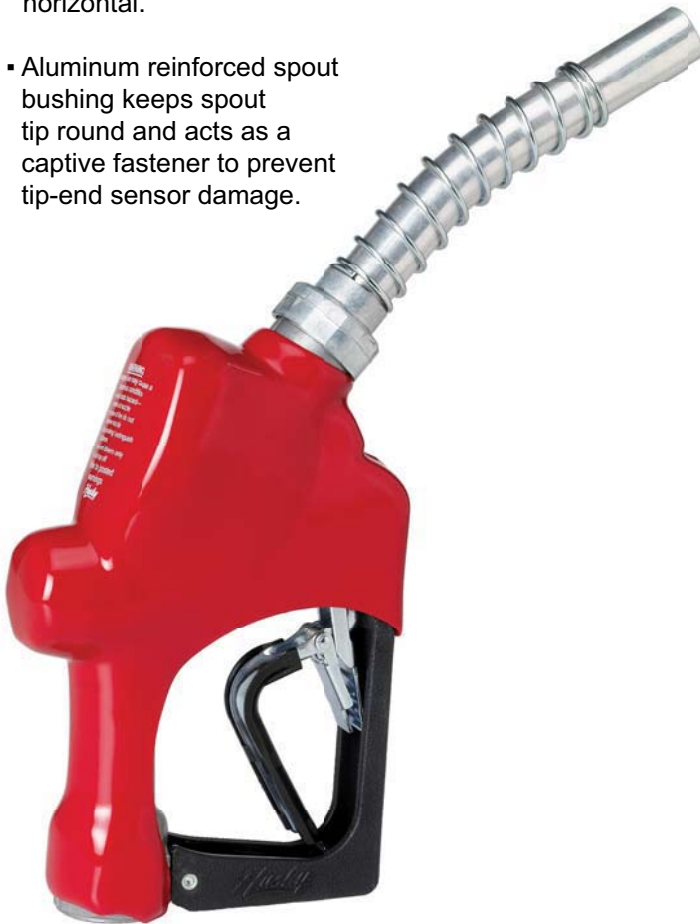

SPECIFYING INFORMATION

Model Number	Description	Weight lbs (kg)
New Unleaded Nozzles w/ NPTF Threads:		
209804	w/ Standard Hold Open Clip	2.9 (1.3)
209808	w/o Hold Open Clip	2.9 (1.3)
209859	w/ Hold Open Clip w/ Reducer Bushing	2.9 (1.3)
209864	w/ Standard Hold Open Clip & Waffle Splash Guard	2.9 (1.3)
209872	w/ Standard Hold Open Clip, Waffle Splash Guard & Reducer Bushing	2.9 (1.3)

New Unleaded Nozzles w/ BSPP Threads:		
209816	w/ Standard Hold Open Clip	2.9 (1.3)
209820	w/o Hold Open Clip	2.9 (1.3)

New Light Duty Diesel Nozzles w/ NPTF Threads:		
209803	w/ Standard Hold Open Clip	3.0 (1.4)
209803G	w/ Standard Hold Open Clip & Gasoila Sealant	3.0 (1.4)
209807	w/o Hold Open Clip	3.0 (1.4)
209861	w/ Standard Hold Open Clip & Reducer Bushing	3.0 (1.4)
209863	w/ Standard Hold Open Clip & Waffle Splash Guard	3.0 (1.4)
209873	w/ Standard Hold Open Clip, Waffle Splash Guard & Reducer Bushing	3.0 (1.4)

New Light Duty Diesel Nozzles w/ BSPP Threads:		
209815	w/ Standard Hold Open Clip	3.0 (1.4)
209819	w/o Hold Open Clip	3.0 (1.4)

CONSTRUCTION

Body	Die cast aluminum body with black hand guard.
Seals	Viton® (Fluorocarbon)
Packing	Double o-ring seal protected by fiber reinforced Teflon
Lever	One piece contoured steel with hard plastic cover
Inlet	1" / 25.4 mm NPTF & BSPP


PATENTS and LISTINGS

Patent Numbers: 4,809,753

Listings: 



MADE IN THE U.S.A.

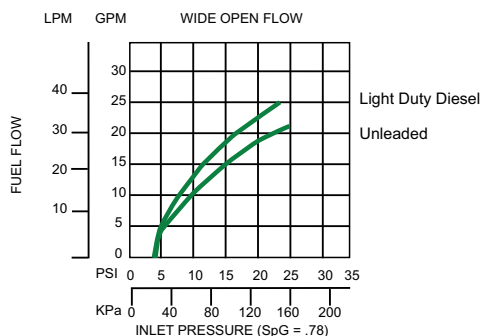

HUSKY 1A NOZZLE

AUTOMATIC NOZZLE

- **Dimensions**
- **Accessories**



Safe-T-Breaks®

Model No.	Description
5812	1" F x 1" F NPTF Non-Reconnectable Safe-T-Break®
2276	1" F x 1" F NPTF Reconnectable Safe-T-Break®
2276G	1" F x 1" F NPTF Reconnectable Safe-T-Break® w/ Gasoila Sealant
6301	1" F x 1" F NPTF Non-Reconnectable PCC Safe-T-Break®
5231	1" F x 1" F NPTF Low Pull Reconnectable
581277	1" F x 1" F NPTF Non-Reconnectable Safe-T-Break® w/ 1" M x 1" M Whip Hose
227677	1" F x 1" F NPTF Reconnectable Safe-T-Break® w/ 1" M x 1" M Whip Hose
6914	1" F x 1" F BSPP Non-Reconnectable Safe-T-Break®
3076	1" F x 1" F BSPP Reconnectable Safe-T-Break®

Swivels

Model No.	Description
0087	1" M x 1" F NPTF Multi-Plane Swivel
0087G	1" M x 1" F NPTF Multi-Plane Swivel w/ Gasoila Sealant
4860	1" M x 1" F NPTF Multi-Plane High Flow Swivel
4860G	1" M x 1" F NPTF Multi-Plane High Flow Swivel w/ Gasoila Sealant
0095	1" M x 1" F NPTF 70° Pump Swivel
0087W	1" M x 1" F NPTF Multi-Plane Swivel w/ Warm Weather Seals
3395	1" M x 1" F NPTF Multi-Plane Restricted Swivel
0352	1" M x 3/4" F NPTF Multi-Plane Swivel
0356	1" M x 3/4" F NPTF Multi-Plane Swivel Anodized Black
1670	1" M x 1" F BSPT Multi-Plane Swivel
3306	1" M x 1" F BSPP Multi-Plane Swivel
3306W	1" M x 1" F BSPP Multi-Plane Swivel w/ Warm Weather Seals

Swivel-Safe-T-Breaks® Combo

Model No.	Description
5969	1" M NPTF Multi-Plane Swivel connected to 1" F NPTF Reconnectable Safe-T-Break®

Spouts

Model No.	Description
1473	Unleaded Spout w/o Flo-Stop™
1471	Light Duty Diesel Spout w/o Flo-Stop™

Guards

Model No.	Description
0099	Protection Package
1804	Full Grip Reguard
1808	Waffle Splash Guard
1811	Reguard Protection Package
0554	Full Grip Guard
5494	Trigger Cover
6655	POPD Full Grip Guard

Whip Hoses

Model No.	Description
2277	1" M x 1" M NPTF Whip Hose

Test Equipment

Model No.	Description
0397	Unleaded Spout Gauge
0385	1" M x 3/4" F Reducer Bushing

